


LED T5HO Tube

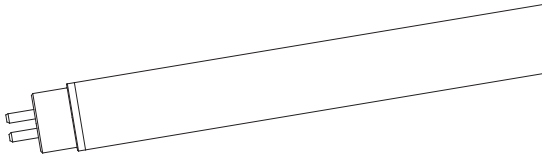

You could reach Commercial LED to buy the specific model of lighting tube.

Website: <https://comm-led.com>


Address: PO Box 668755, Pompano Beach, FL 33066

LED Tube Technical Data

Model	CLT95-25WT51-XX-B-Y
Input voltage/ Frequency for ballast	120~277VAC 50/60Hz
Rated Power	25W
Rated Current	255mA
Power Factor	>0.9
Luminous Flux	3200lm
THD	<20%
Rated CCT	3000K/3500K/4000K/4500K/5000K
Ra	>80
Lifespan	50000hrs

The product package including following components:



Parts listed	Quantities
LED Tube	1
Installation Instructions Sheet	1/8
Label	1

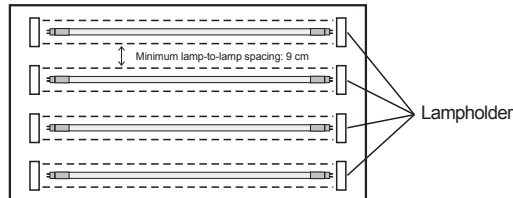

Model Number	MINIMUM Luminaire COMPARTMENT DIMENSIONS
CLT95-25WT51-XX-B-Y	122cm(L) x 55cm(W) x 8cm(H)

Retrofit "Bypass" procedure

1. Turn off the power to the light fixture at the breaker panel before installation.
2. Remove the fluorescent tubes. Please dispose of these items properly as they contain mercury.
3. Cut the wires shown as the diagram below.
4. Make the new wire connect to branch circuit shown as the diagram below.
5. Replace the cover over the wiring channel.
6. Install the LED tubes.
7. After modification completes, then affix the Lamping Replacement Marking label and cautionary label, locate this where visible during re-lamping on the retrofitted luminaire.
8. Turn on the power.

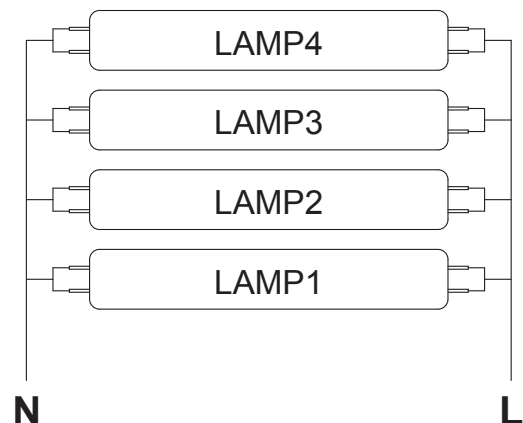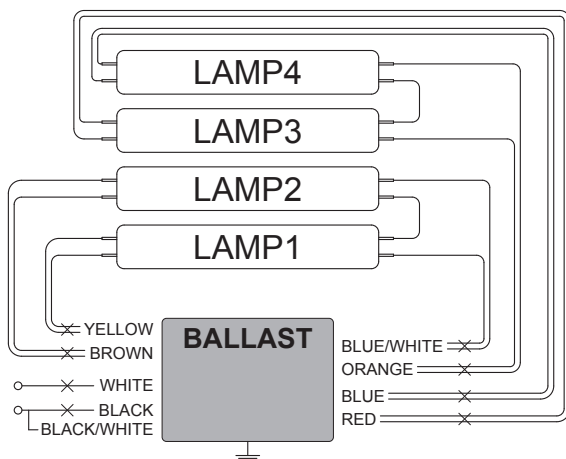

For four/three lamp application need to put the black/white and black wires together

CAUTION:

- ▶ NOT FOR EMERGENCY LIGHTING.
- ▶ WARNING - RISK OF FIRE OR ELECTRIC SHOCK. LED RETROFIT KIT INSTALLATION REQUIRES KNOWLEDGE OF LUMINAIRES ELECTRICAL SYSTEMS. IF NOT QUALIFIED, DO NOT ATTEMPT INSTALLATION. CONTACT A QUALIFIED ELECTRICIAN.
- ▶ WARNING - RISK OF FIRE OR ELECTRIC SHOCK. INSTALL THIS KIT ONLY IN LUMINAIRES THAT HAVE THE CONSTRUCTION FEATURES AND DIMENSIONS SHOWN IN THE PHOTOGRAPHS AND/OR DRAWINGS AND WHERE THE INPUT RATING OF THE RETROFIT KIT DOES NOT EXCEED THE INPUT RATING OF THE LUMINAIRE.
- ▶ DO NOT MAKE OR ALTER ANY OPEN HOLES IN AN ENCLOSURE OF WIRING OR ELECTRICAL COMPONENTS DURING KIT INSTALLATION.
- ▶ WARNING - TO PREVENT WIRING DAMAGE OR ABRASION, DO NOT EXPOSE WIRING TO EDGES OF SHEET METAL OR OTHER SHARP OBJECTS.
- ▶ INSTALLERS SHOULD NOT DISCONNECT EXISTING WIRES FROM LAMPHOLDER TERMINALS TO MAKE NEW CONNECTIONS AT LAMPHOLDER TERMINALS. INSTEAD INSTALLERS SHOULD CUT EXISTING LAMPHOLDER LEADS AWAY FROM THE LAMPHOLDER AND MAKE NEW ELECTRICAL CONNECTIONS TO LAMPHOLDER LEAD WIRES BY EMPLOYING APPLICABLE CONNECTORS.
- ▶ FOR CNC ONLY: THIS RETROFIT KIT IS ACCEPTED AS A COMPONENT OF A LUMINAIRE WHERE THE SUITABILITY OF THE COMBINATION SHALL BE DETERMINED BY AUTHORITIES HAVING JURISDICTION.
- ▶ EXAMINE ALL PARTS THAT ARE NOT INTENDED TO BE REPLACED BY THE RETROFIT KIT FOR DAMAGE AND REPLACE ANY DAMAGED PARTS PRIOR TO INSTALLATION OF THE RETROFIT KIT.