

# LED Wall Pack Light Installation Instruction

## Special functions instruction:


### Wattage adjustable instruction

Turn the wattage adjustable knob to a certain wattage gear, the power of the lamp will change to the corresponding wattage.

Adjustable wattage range: 25%-100%.

#### Note:

**Please turn off the power before adjusting the wattage.**

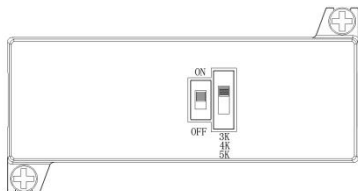

### Photocell and CCT adjustment integrated controller

#### CCT adjustment

1, The color temperature of the lamp turns to 3000K when the DIP switch is set to 3K;

2, The color temperature of the lamp turns to 4000K when the DIP switch is set to 4K;

3, The color temperature of the lamp turns to 5000K when the DIP switch is set to 5K;

#### Photocell function

1, Turn the DIP switch to ON means the photocell is turned on ;

2, Turn the DIP switch to OFF means the photocell is turned off ;

#### Note:

**Please turn off the power before adjustment.**

### Applications:

Tunnel (except for motor vehicle tunnel), workshop, warehouse, factory, house, building exterior, etc.


### Cautions:

1. Do not use an electric generator to test the LED fixture.
2. Please abide by related country, regional and local law and regulations when install this fixture;
3. Do not install the fixture in raining days to avoid electrical shock or damage.

### Notes:

1. To avoid possibility of electrical shock or fire, the installation personnel must have professional electric knowledge;
2. Please wear gloves to avoid injury before installation;
3. If smoke or fire is found in wires or led fixture during or after installation, please turn off the power immediately and notify relevant personnel;
4. This fixture is available in outdoor usage, but the distance from fixture to ground should be more than 2m.


This installation instruction applies to the following products. Although the products vary in appearance, their installation steps are the same:



### Installation I:




1. Turn off the power.




2. Use a screwdriver to remove the screws on both sides.




3. Open the fixture, disconnect the connection terminals, and remove the upper cover of the fixture.




5. Drill through the mounting hole with an electric drill.



7. Thread the wire through the bottom hole.




9. L,N and G wires connected to the power supply.




11. Fix the fixture with screws.


**Installation II:**




1. Turn off the power.




4. Use a screwdriver to remove the plug.




6. Attach EVA cotton pad to bottom shell.




8. Lock the bottom shell on the mounting seat with screws.




10. Install the cover of the fixture and connect the terminal block.




12. Make sure the installation is complete before turning on the power switch.




2. Use a screwdriver to remove the screws on both sides.




3. Open the fixture, disconnect the connection terminals, and remove the upper cover of the fixture.




5. Drill a hole in the wall with an electric drill.



7. Use a screwdriver to remove the side plug and attach the EVA cotton pad to the mounting hole.



9. The top terminal connect the wire tube through the side hole to the L,N and G wires on the power supply.




11. Fix the fixture with screws.

**Standard wire:**


L/live wire: Black\Brown; N/null wire: White\Blue; Ground wire: Green\Yellow-green.

**Warning:** During grounding, make sure the earth wire of the driver and fixture housing are connected together with the earth wire of the local power supply.


MIN 75 °C SUPPLY CONDUCTOR  
THIS PRODUCT MUST BE INSTALLED IN ACCORDANCE WITH THE APPLICABLE INSTALLATION CODE BY A PERSON FAMILIAR WITH THE CONSTRUCTION AND OPERATION OF THE PRODUCT AND THE HAZARDS INVOLVED.




4. Drill through the mounting hole with an electric drill.




6. Push the expansion rubber plug into the mounting hole on the wall.



8. Push the expansion rubber plug into the mounting hole on the wall.



10. Install the upper cover of the fixture and connect the terminal line.



12. Make sure the installation is complete before turning on the power switch.