




LED PANEL LAMP

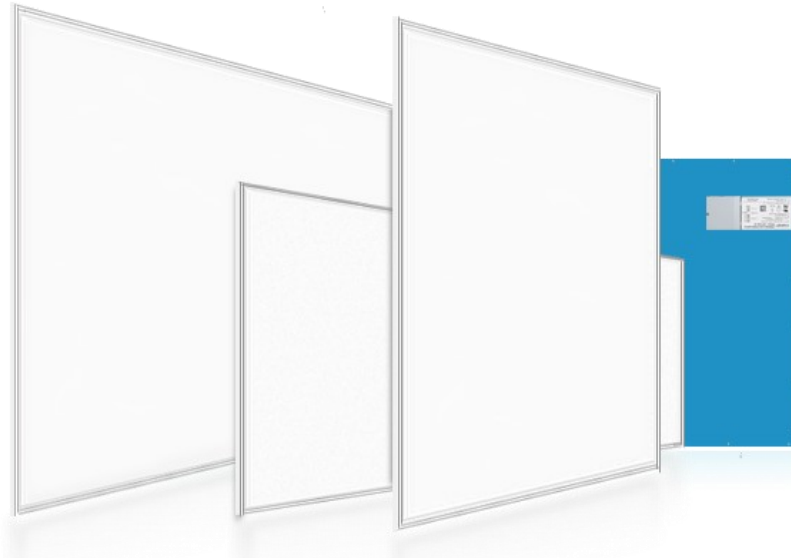

PRODUCT FEATURES

- UL Certified with Isolated External Power Supply
- Edge-lit LED Technology
- 100-277 Voltage Rating, 0-10V Dimming
- PMMA or MS LGP
- DLC Premium & DLC Standard Available
- High Luminous Efficiency 100 - 130 Lm/W
- Flicker-free
- 50,000 Hour Lifetime Rating
- 3-Year Limited Non-Yellowing Warranty (MS LGP)
- 5-Year Limited Warranty

PRODUCT SPECIFICATIONS

MODEL	MATERIAL	POWER (W)	LUMENS (LM)	CCT (K)	DIMENSIONS (FT)	EFFICIENCY (lm/W)	BEAM ANGLE
CLP7-2X2-40WN-S40KA / S50KA (MS) ¹	MS LGP	40	4000	4000 / 5000	2 X 2	100	120°
CLP7-2X4-50WN-S40KA / S50KA (MS) ¹	MS LGP	50	5000	4000 / 5000	2 X 4	100	120°
CLP7-2X2-40WN-S40KA / S50KA ¹	PMMA LGP	40	4000	4000 / 5000	2 X 2	100	120°
CLP7-2X4-50WN-S40KA / S50KA ¹	PMMA LGP	50	5000	4000 / 5000	2 X 4	100	120°
CLP7-2X2-40WN-P40KA / P50KA ^{1,2}	PMMA LGP	40	5000	4000 / 5000	2 X 2	125	120°
CLP7-2X4-50WN-P40KA / P50KA ^{1,2}	PMMA LGP	50	6250	4000 / 5000	2 X 4	125	120°
CLP2-25W-1X4-28-TG-01 ²	PMMA LGP	25	3250	4000 / 5000	1 X 4	130	120°
CLP2-25W-2X2-28-TG-01 ²	PMMA LGP	25	3250	4000 / 5000	2 X 2	130	120°
CLP2-50W-2X4-28-TG-01 ²	PMMA LGP	50	6500	4000 / 5000	2 X 4	130	120°

¹ UL Listed for both Recessed and Surface mounting

² DLC PREMIUM LISTED

