



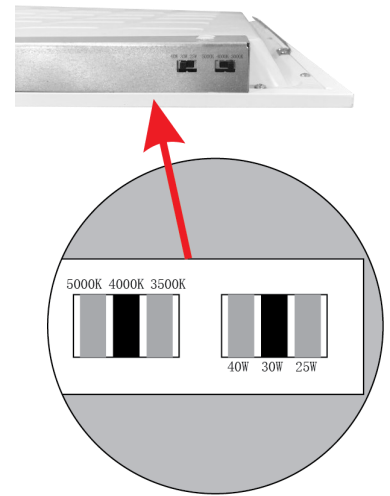

LED BACKLIT PANEL

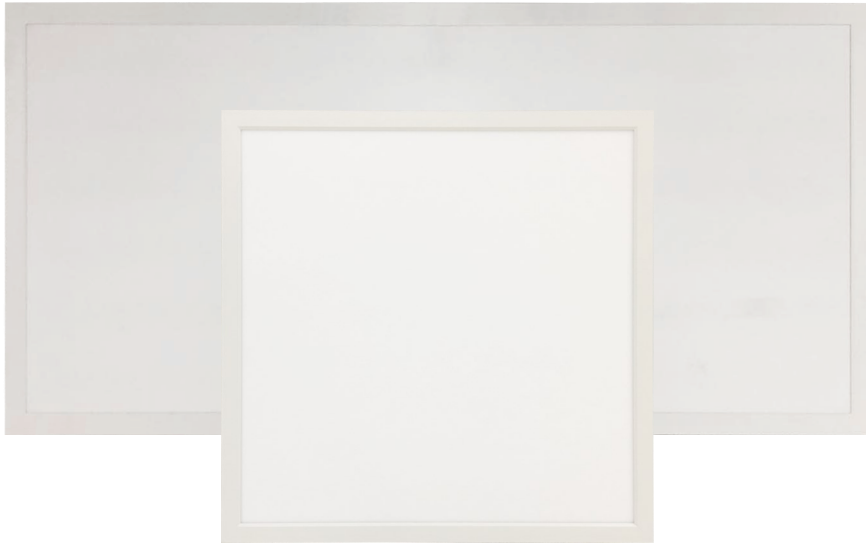

PRODUCT FEATURES

- Seamless White Finish Frame
- Concave-Convex Edge Fold Aluminum Backplate
- Back-lit LED Technology
- No LGP - Non-Yellowing Optical Lens
- DLC Listed
- UL Certified
- Tunable Power & CCT Available
- 0-10V Dimming
- High Luminous Efficiency
- Flicker-free Lighting
- 50,000 Hour Lifetime Rating
- 5-Year Limited Warranty
- Operational Temperature Range -13°F to 104°F (-25°C to 40°C)

PRODUCT SPECIFICATIONS

MODEL	POWER (W)	VOLTAGE (V)	CCT (K)	DIMENSIONS (mm)	EFFICIENCY (lm/W)	CRI
CLP7-2X2-BLS-40WD- 35/40/50 KDN	40	120-277	3500/4000/5000	602 x 602 x 30	110	> 80
CLP7-2X4-BLS-50WD- 35/40/50 KDN	50	120-277	3500/4000/5000	602 x 1209 x 30	110	> 80
CLP7-2X2-BLS-40WD-PCBN (TUNABLE POWER / CCT)	25 30 40	120-277	3500 4000 5000	602 x 602 x 30	110	> 80
CLP7-2X4-BLS-50WD-PCBN (TUNABLE POWER / CCT)	30 40 50	120-277	3500 4000 5000	602 x 1209 x 30	110	> 80

