




LED T5 DUAL MODE TUBES

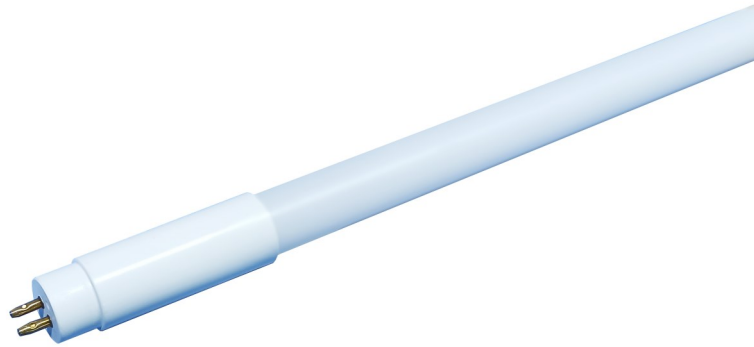

PRODUCT FEATURES

- Direct Replacement / Plug & Play Mode (Type A) *
- Retrofit / Bypass Mode - Double and Single Ended (Type B)
- Replaces F54T5HO
- Film Coated Shatter Resistant Glass Tube
- Frosted
- Non-Dimming
- 120-277 Voltage Rating, PF > 0.9
- CRI > 80
- G5 Mounting
- NSF Certified
- UL Certified
- 50,000 Hour Lifetime Rating
- 5-Year Limited Warranty
- Operating Temperature Range: -4°F to 113°F (-20°C to 45°C)

PRODUCT SPECIFICATIONS

MODEL	POWER (W)	LUMENS (LM)	CCT (K)	LENGTH (IN)	EFFICIENCY (Lm/W)	BEAM ANGLE
CLT97-24WT5-40K-AB	24	3050	4000	45.75	122	200°
CLT97-24WT5-50K-AB	24	3050	5000	45.75	122	200°

