




LED DUAL MODE TUBES

Tunable CCT

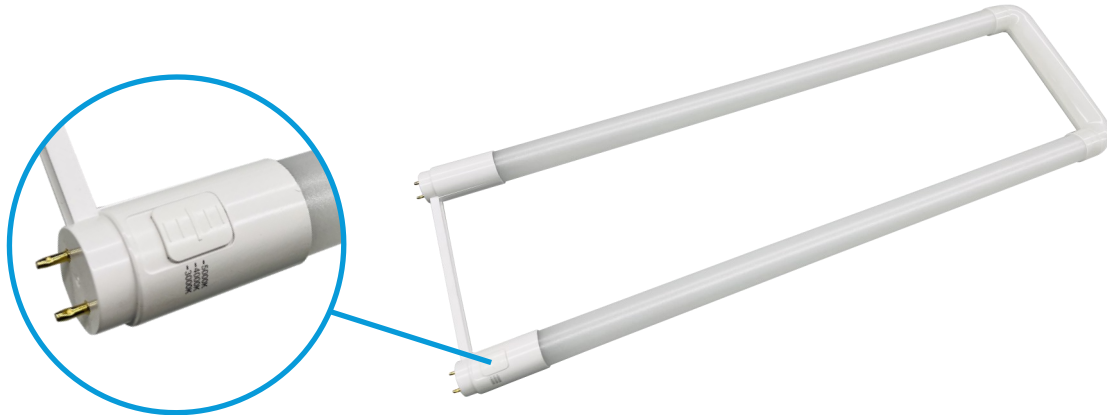

PRODUCT FEATURES

- Direct Replacement / Plug & Play Mode (Type A) *
- Retrofit / Bypass Mode - Double and Single Ended (Type B)
- Tunable CCT
- Film Coated Shatter Resistant Glass Tube
- Frosted
- 0-10V Dimming Available **
- 120-277 Voltage Rating, PF > 0.9
- CRI = 83
- Dual Medium Bi-Pin (2-G13) Mounting
- NSF Certified
- DLC Listed
- UL Certified
- 50,000 Hour Lifetime Rating
- 5-Year Limited Warranty
- Operating Temperature Range: -4°F to 104°F (-20°C to 40°C)

* See Ballast Compatibility Chart
 ** With Approved Dimming Module

PRODUCT SPECIFICATIONS

MODEL	POWER (± 10%)	CCT	LUMENS (± 10%)	LENGTH (± 0.05 in.)	EFFICIENCY	BEAM ANGLE	FIELD ANGLE
-------	---------------	-----	----------------	---------------------	------------	------------	-------------

CLT97-15WU6AB4MS-25K	15W	3500K 4000K 5000K	1950lm	22.45 in.	130 Lm/W	160°	320°
----------------------	-----	-------------------------	--------	-----------	----------	------	------

