




LED FLOOD FIXTURE

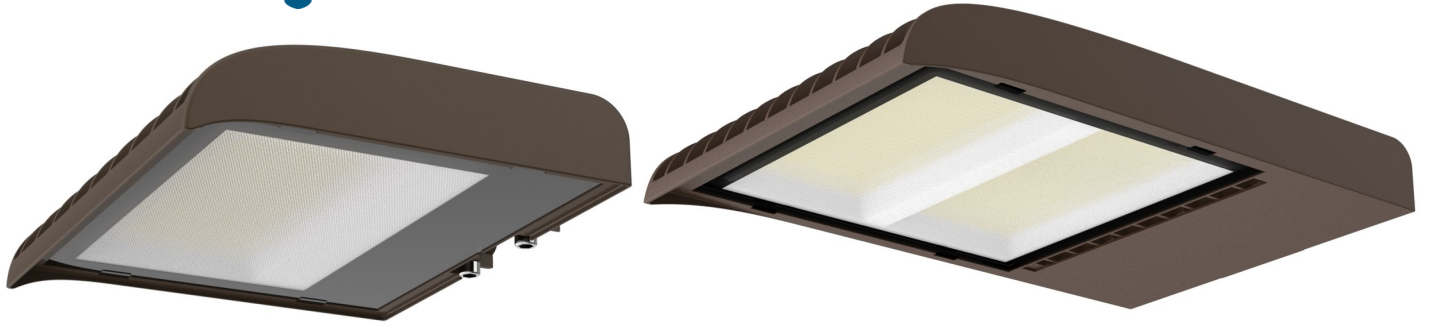

PRODUCT FEATURES

- **TUNABLE POWER**
- Photocell Included - With On/Off Switch
- ADC12 Aluminum Heat Sink Housing
- Outdoor Powder Coating
- Bronze Finish
- IP65 Rating - Suitable for Wet Locations
- Dimming: 0-10V/PWM/VR
- 50,000 Hour Lifetime Rating
- UL Certified
- DLC Premium Listed
- High Light Transmittance PC, Anti-UV and Fire Resistance Lens
- Highly Conductive, Waterproof, Aging Resistance, Salt Mist
- Resistance Aluminum LED Board
- Operating Temperature: -40°F to 104°F (-40°C to 40°C)
- 5-Year Limited Warranty
- Mounts sold separately for 150W - 300W Flood Fixtures
 - Slip-Fitter - CLF4-SLIP FIT-Q (9.88 x 3.5 x 3.0)
 - Straight Arm - CLF4-STRAIGHT ARM-Q (7.13 x 6.13 x 3.5)
 - Trunnion - CLF4-TRUNNION-Q (5.75 x 6.0 x 2.0)
 - Yoke - CLF4-YOKE-150V / CLF4-YOKE-300V
 - Wall Mount Adapter - For Slip-Fitter Mount

PRODUCT SPECIFICATIONS

MODEL	POWER (W)	LUMENS (LM)	CCT (K)	DIMENSIONS (IN)	EFFICIENCY (lm/W)	BEAM ANGLE / OPTIC TYPE	VOLTAGE (V)
CLF4-150VP5YYBR-TN	80 / 100 / 150	10,800 - 20,250	5000	12.6 x 11.5 x 2.75	135	TYPE III	120 - 277
CLF4-300VP5YYBR-TN	200 / 240 / 300	27,000 - 40,500	5000	12.75 x 20.0 x 3.0	135	TYPE III	120 - 277
CLF4-300VPH5YYBR-TN	200 / 240 / 300	27,000 - 40,500	5000	12.75 x 20.0 x 3.0	135	TYPE III	277 - 480



SLIP FITTER



TRUNNION



STRAIGHT ARM



PHOTOCELL



WALL MOUNT ADAPTER



YOKE

