




PRODUCT FEATURES

- Die-Cast Aluminum Alloy Housing
- Bronze Finish
- Tunable CCT (3000K/4000K/5000K)
- IP65 Rating - Suitable for Wet Locations
- 120-277 Voltage Rating, PF > 0.9, THD < 20%
- CRI > 80
- 0-10V Dimming
- Striped Clear Plastic Lens
- DLC Premium Listed
- UL Certified
- 50,000 Hour Lifetime Rating
- 5-Year Limited Warranty
- Operating Temperature Range: -22°F to 113°F (-30°C to 45°C)


PRODUCT SPECIFICATIONS

MODEL	ITEM #	POWER (W)	LUMENS (LM)	CCT (K)	DIMENSIONS (IN) (L x W x H)	EFFICIENCY (Lm/W)	BEAM ANGLE
CLCN11-75WBSP1DA1	L75WTUNCNSCL11	75	9000	3000	10.01 x 10.01 x 4.15	122 - 135	160°
			9600	4000			
			9600	5000			

Luminous Intensity Distribution Curve

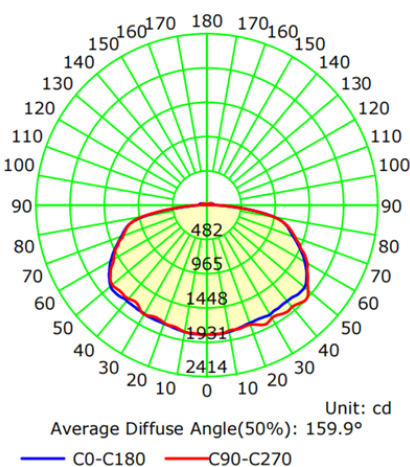

The Average Illuminance Effective Figure

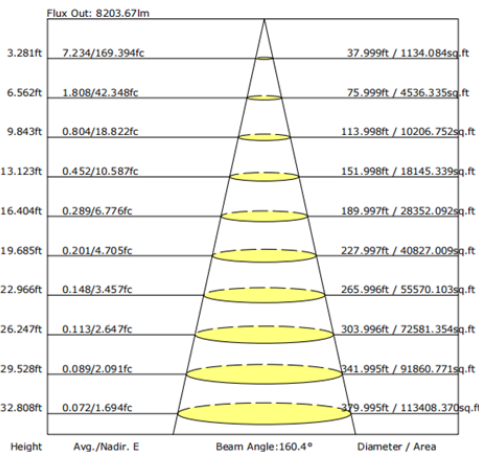

DIAGRAM

