



LED DUAL MODE TUBES

Tunable CCT




PRODUCT FEATURES

- **TUNABLE CCT (3000K/3500K/4000K/5000K/6500K)**
- Direct Replacement / Plug & Play Mode (Type A) *
- Retrofit / Bypass Mode - Double and Single Ended (Type B)
- Bypass installation utilizes existing lamp holders
- Film Coated Shatter Resistant Glass Tube
- Frosted
- Instant On / No Flicker
- 1-10% Dimming
- No Mercury, Lead Free
- Low Maintenance
- 120-277 Voltage Rating
- 80+ CRI
- Dual Medium Bi-Pin (2-G13) Mounting
- DLC Listed
- UL Certified
- 50,000 Hour Lifetime Rating
- 5-Year Limited Warranty
- Operational Temperature Range: -4°F to 113°F (-20°C to 45°C)

* See Ballast Compatibility Chart

PRODUCT SPECIFICATIONS

MODEL	ITEM #	POWER (W)	LUMENS (LM)	CCT (K)	LENGTH (IN)	EFFICIENCY (lm/W)	BEAM ANGLE
CLT93-13WU6-5CCT-AB	L13WU65CABCL93	13	1950	3000	24.0	146	140°
			2000	3500			
			2050	4000			
			2000	5000			
			6500	6500			

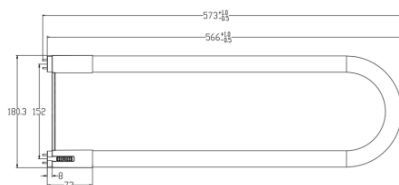

clt_13wu6_5cct_ab_specs-051426-Rev.000

