



LED UFO HIGH BAY FIXTURE

Tunable Wattage & CCT




PRODUCT FEATURES

- TUNABLE POWER - 180W / 200W / 240W**
- TUNABLE CCT - 4000K / 5000K**
- Die-Cast Aluminum Alloy Housing
- Black Finish
- 120-277 Voltage Rating, PF > 0.9, THD < 20%
- CRI > 80
- Mercury and UV Free
- Dimming: 0-10V
- Sensor Ready
- Clear PC Lens
- 1/2" Female Thread for Stem Mount
- IP65 Rating - Suitable for Wet Locations
- 6kV Surge Protection
- 50,000 Hour Lifetime Rating
- 5-Year Limited Warranty
- DLC Premium Listed
- UL Certified
- Operating Temperature: -40°F to 122°F (-40°C to 50°C)

PRODUCT SPECIFICATIONS

MODEL	ITEM #	POWER (W)	LUMENS (LM)	CCT (K)	EFFICIENCY (lm/W)	DIMENSIONS (IN) D x H	BEAM ANGLE
CLU11-240WS1BT2A1-BH40/50WD	L240WTUNUFOCL11	180	26,100				
		200	29,000	4000	154	Ø 12.6 x 6.8	90°
		240	34,800	5000	145		

PHOTOMETRY

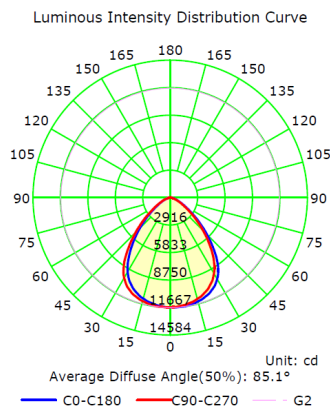

The Average Illuminance Effective Figure

Flux Out: 15291.87lm

Height	Avg./Nadir, E	Beam Angle: 84.9°	Diameter / Area
1.0m	809.74 / 11623.41lx		1.83m / 2.63sq.m
2.0m	404.87 / 2905.85lx		3.66m / 10.53sq.m
3.0m	269.91 / 1201.49lx		5.49m / 23.69sq.m
4.0m	203.79 / 726.46lx		7.32m / 42.11sq.m
5.0m	163.84 / 464.94lx		9.15m / 65.80sq.m
6.0m	137.38 / 322.87lx		10.98m / 94.76sq.m
7.0m	118.57 / 227.21lx		12.81m / 128.97sq.m
8.0m	101.78 / 161.62lx		14.65m / 168.45sq.m
9.0m	87.73 / 116.23lx		16.48m / 213.20sq.m
10.0m	75.10 / 84.91lx		18.31m / 263.21sq.m

